

Trimline 46 Front

SMALL, SQUARE AND SMOOTH FIREPLACE



First-class looks that will light up your home, both literally and figuratively

Do you have a small home and the desire to have a fireplace? No problem; the Trimline 46 Front has got you covered, and is perfectly stylish to boot. Be captivated by its flames. The Trimline 46 Front can be installed with a direct wall termination. No chimney needed.

The standard version of this frontal fireplace has a burner bed made of wooden logs and a smooth steel interior. On top of that, it comes with the Ecomax remote control and you have the options of adding Wi-Fi-control with our Trimline Fires app.

Product specifications

FEATURES

- Balanced flue gas fire
- Front model
- Single burner
- Ecomax remote control
- Antracite steel panel interior

OPTIONALS

- Pebbles fuel bed
- Anti reflective glass
- Mains adapter GV60
- Wall bracket remote control
- Domotica smart connection
- Wall switch
- Set for app control
- Puck control

Styling & Optionals

Ecomax remote control

For absolute ease of use all appliances are supplied with an Ecomax remote system that controls the fire at the touch of a button.




Optionals and Trimline Wi-Fi control

The Trimline 46 Front has the option to trade your wooden logs for another kind of natural look; pebble stones. It is also possible to add Wi-Fi control with our Trimline Fires app.



Trimline 46 Front

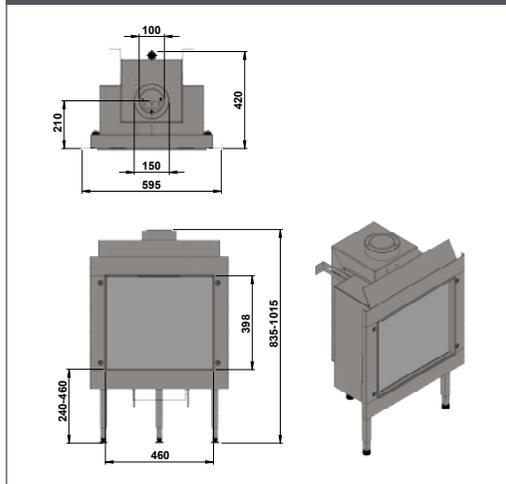

Appliance name	Trimline 46 Front			
Appliance type	Balanced flue built-in gas fire (C11, C31, C91)			
Purpose	Ambient heating, real flames			
Engine identification	1090			
Gas type-pressure	Natural gas G25.3 – 25 mbar	Natural gas G20 – 20 mbar	Natural gas G25 – 20 mbar	LPG G30/31 – 28-50 mbar
Heat input (kW)	6.8	6.6	6.8	6.8
Heat output max (kW)	5.8	5.7	6.0	5.7
Heat output min (kW)	2.7	2.8	2.7	2.6
Consumption (m ³ /h and kg/h LPG)	0.8	0.7	0.8	0.5
Efficiency (%)	86	86	89	86
Energy label highest efficiency	B	B	A	B
Flue lay out wall termination	Direct possible and indirect 1m vertical and max 3.5m horizontal			
Weight (kg)	55			
Efficiency class EN613	1			
NOx Class	5			
PIN ID CE	0063BP3561			
Gas connection	3/8" outside connection			
Electrical connection	6 VDC battery powered			
Gas control system	Mertik Maxitrol SYMAX B6R radio controlled 866 mHz			
Safety	Thermocouple flame supervision and pressure hatches			
Heat distribution	Internal convection system			
Connectivity	Optional App control (Android and IOS), wall switch and domotica connection			
Flue type and diameter	Holetherm-CC concentric flue 100-150mm			
Standard supplied	Adjustable legs – Convection chamber and grills – Wall brackets – Log set			
Optional	See product specifications			
Remarks	Always use non-combustible construction materials such as metal stud framing and fireboard cladding			

Installation details

Concentric flue system

Using the THC-CC double wall chimney system the flue gases are safely transported to the outside and fresh combustion-air is pulled inside the appliance. Balanced flue appliances can be installed using a wall terminal so no traditional chimney is needed. THC-CC is made of high quality stainless steel and approved according CE standards in combination with the Trimline appliances.



Balanced flue gas fire

One of the most innovative aspects of the Trimline 46 Front is that there is no need for an existing chimney to be present. This is all down to the clever features of our balanced flue gas fire, that is fully room sealed. Not only does this make for a highly efficient and safe appliance, but when combined with our concentric flue system, our fires can be positioned in virtually any part of your home with a relatively simple 'chimney breast' built around it. A direct wall outlet from the back of the fire makes the installation even easier.