
Trimline 63H Front





Do you have a narrow, sloping wall in one of your rooms, and are you looking to add warmth and cosiness to your home? The Trimline 63H Front could be perfect for you. This frontal fireplace can be installed in even the smallest spaces. The Trimline 63H Front is a gas fireplace with a double burner, which creates a beautiful interplay of flames while limiting the amount of heat being generated. The standard version comes with a burner bed made of wooden logs and a lamelas interior. On top of that, it comes with the Ecomax remote control and you have the options of adding Wi-Fi-control with our Trimline Fires app.

Product specifications

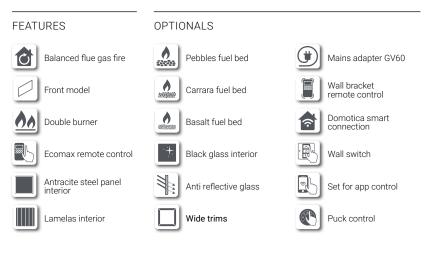

Styling & Optionals

Ecomax remote control

For absolute ease of use all appliances are supplied with an Ecomax remote system that controls the fire at the touch of a button.

Options interior finish materials and Trimline Wi-Fi control

For that extra WOW factor, there is also an option to upgrade to a black glass lining within the combustion chamber which offers a remarkable effect of added depth and detail. Other available upgrades also include Wi-Fi and alternative frame options.









Appliance name	Trimline 63H Front	Trimline 63H Front			
Appliance type	Balanced flue built-in gas fires (C11, C31, C91)				
Purpose	Ambient heating, real flames				
Engine identification	1095				
Gas type-pressure	Natural gas G25.3 – 25 mbar	Natural gas G20 – 20 mbar	Natural gas G25 – 20 mbar	LPG G30/31- 28-50 mbar	
Heat input (kW)	8.7	9.2	8.1	8.4	
Heat output max (kW)	7.6	8.1	7.1	7.3	
Heat output min (kW)	2.7	2.5	2.4	2.3	
Consumption (m ³ /h and kg/h LPG)	0.8	1.0	0.7	0.5	
Efficiency (%)	87	88	87	86	
Energy label highest efficiency	В	В	В	В	
Flue lay out wall termination	Indirect 1m vertical and max 3,5m horizontal				
Weight (kg)	75				
Efficiency class EN613	1				
NOx Class	5				
PIN ID CE	0461CQ1048				
Gas connection	3/8" outside connection				
Electrical connection	6 VDC battery powered				
Gas control system	Mertik Maxitrol SYMAX B6R radio controlled 866 mHz				
Safety	Thermocouple flame supervision and pressure hatches				
Heat distribution	Internal convection system				
Connectivity	Optional App control (Android and IOS), wall switch and domotica connection				
Flue type and diameter	Holetherm-CC concentric flue 100-150mm				
Standard supplied	Adjustable legs – Convection chamber and grills – Wall brackets – Log set				
Optional	See product specifications				
Remarks	Tapered built-in chamber to place fire in 45 degree angled walls. Always use non-combustible construction materials such as metal stud framing and fireboard cladding.				

Installation details

Concentric flue system

Using the THC-CC double wall chimney system the flue gases are safely transported to the outside and fresh combustion-air is pulled inside the appliance. Balanced flue appliances can be installed using a wall terminal so no traditional chimney is needed. THC-CC is made of high quality stainless steel and approved according CE standards in combination with the Trimline appliances.



Balanced flue gas fire

One of the most innovative aspects of the Trimline 63H Front is that there is no need for an existing chimney to be present. This is all down to the clever features of our balanced flue gas fire, that is fully room sealed. Not only does this make for a highly efficient and safe appliance, but when combined with our concentric flue system, our fires can be positioned in virtually any part of your home with a relatively simple 'chimney breast' built around it. A direct wall outlet from the back of the fire makes the installation even easier.



V61020