Trimline 64 Panoramic





Who says a luxurious home needs to be big? The Trimline 64 Panoramic shows you wrong. This relatively small fireplace has it all! With its three-sided glass you have a perfect view on the burning logs from all over the room. This might be the fire you have ever dreamed about!

The Trimline 64 Panoramic has tons of customizable features. but no matter the features you choose, the end result will be impeccably stylish. Moreover, the 64 series also includes a frontal and corner version. It comes with the Ecomax remote control and you can choose to add WiFi-control with our Trimline Fires app.



Product specifications

FEATURES

Balanced flue gas fire

Panoramic model

Ecomax remote control

Antracite steel panel

Double burner

woodlogs

Wide trims



OPTIONALS

LED glowing fuel bed



Wall bracket remote control



Reeded interior





Grey stone interior





Black glass interior



Anti reflective glass



Mains adapter GV60



Domotica smart connection



Wall switch



Wi-Fi remote app



Puck control

Styling & Optionals

Ecomax remote control


For absolute ease of use all appliances are supplied with an Ecomax remote system that controls the fire at the touch of a button.



Options interior finish materials and Trimline Wi-Fi control

For that extra WOW factor, there is also an option to upgrade to a black glass lining within the combustion chamber which offers a remarkable effect of added depth and detail. Other available upgrades also include Wi-Fi, anti reflective glass.



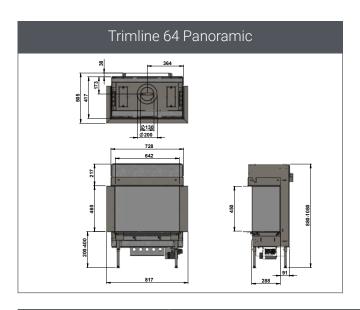

Appliance name	Trimline 64 Panoramic			
Appliance type	Balanced flue built-in gas fires (C11, C31, C91)			
Purpose	Ambient heating, real flames			
Engine identification	1187 (Panoramic)			
Gas type-pressure	Natural gas G25.3 – 25mbar	Natural gas G20 – 20mbar	Natural gas G25 – 20mbar	LPG G30/G31 - (28-30)-37/50mbar
Heat input (kW)	9	9.5	7.8	11.2
Heat output max (kW)	7.4	7.7	6.4	9.2
Heat output min (kW)	3	3.2	2.6	2.8
Consumption (m³/h and kg/h LPG)	1.1	1	1	0,4m³/h and 0,7kg/h
Efficiency (%)	82	82	82	82
Energy label highest efficiency	В	В	В	В
Flue lay out wall termination	Indirect 1m vertical and max 5,5m horizontal / LPG max 3m horizontal			
Weight (kg)	160			
Efficiency class EN613	2			
NOx Class	4			
PIN ID CE	0461CV1116			
Gas connection	3/8" outside connection			
Electrical connection	6 VDC battery powered			
Gas control system	Mertik Maxitrol SYMAX B6R radio controlled 866 mHz			
Safety	Thermocouple flame supervision and pressure hatches			
Heat distribution	Internal convection system			
Connectivity	Optional App control (Android and IOS), wallswitch and domotica connection			
Flue type and diameter	Holetherm-CC concentric flue 130-200mm			
Standard supplied	Adjustable legs – Convection chamber and grills – Log set – Build-in cassette			
Optional	Support iron for brickwork chimney breast – Wall brackets – LED module			
Remarks	Always use non-combustible construction materials such as metal stud framing and fireboard cladding			

Installation details

Concentric flue system

Using the THC-CC double wall chimney system the flue gases are safely transported to the outside and fresh combustion-air is pulled inside the appliance. Balanced flue appliances can be installed using a wall terminal so no traditional chimney is needed. THC-CC is made of high quality stainless steel and approved according CE standards in combination with the Trimline appliances.



Balanced flue gas fire

One of the most innovative aspects of the Trimline 64 Panoramic is that there is no need for an existing chimney to be present. This is all down to the clever features of our balanced flue gas fire, that is fully room sealed. Not only does this make for a highly efficient and safe appliance, but when combined with our concentric flue system, our fires can be positioned in virtually any part of your home with a relatively simple 'chimney breast' built around it. A direct wall outlet from the back of the fire makes the installation even easier.

