Trimline 73 Front

CREATES A LUXURIOUS AMBIENCE IN ANY ROOM



Are you looking for a generous landscape fireplace, without having to sacrifice too much valuable space? Go for the Trimline 73 Front. The Trimline 73 Front is suitable for a range of interior styles and will provide the finishing touch for your interior vision. Thanks to its double burner, the flames are both beautifully vibrant and energy-efficient.

The standard burner bed for the Trimline 73 is made of wooden logs, and the standard interior has a slatted design. On top of that, it comes with the Ecomax remote control and you have the options of adding Wi-Fi-control with our Trimline Fires app.



trimline

Product specifications

FEATURES

Balanced flue gas fire

Front model

Double burner



Pebbles fuel bed



Set for app control

Puck control



OPTIONALS

Anti reflective glass





Wide trims



Wood logs fuel bed



Mains adapter GV60



Wall bracket



Antracite steel panel

Lamelas interior



Domotica smart



Wall switch

Styling & Optionals

Ecomax remote control


For absolute ease of use all appliances are supplied with an Ecomax remote system that controls the fire at the touch of a button.



Options interior finish materials and Trimline Wi-Fi control

For that extra WOW factor, there is also an option to upgrade to anti-reflective glass. Other available upgrades also include Wi-Fi and alternative frame options.



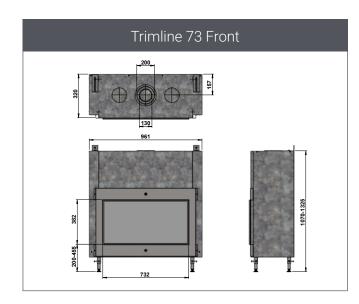



Appliance name	Trimline 73 Front			
Appliance type	Balanced flue built-in gas fires (C11, C31, C91)			
Purpose	Ambient heating, real flames			
Engine identification	1134 (F)			
Gas type-pressure	Natural gas G25.3-25mbar	Natural gas G20-20mbar	Natural gas G25-20mbar	LPG G30/31-28-50mbar
Heat input (kW)	11.0	11.4	9.4	9.3
Heat output max (kW)	9.8	10.2	8.4	7.9
Heat output min (kW)	2.7	3.1	2.5	2.6
Consumption (m³/h and kg/h LPG)	1.3	1.2	1.16	0.5
Efficiency (%)	89	89	89	85
Energy label highest efficiency	A	A	А	В
Flue lay out wall termination	Indirect 1m vertical and max 3.5m horizontal			
Weight (kg)	110			
Efficiency class EN613				
NOx Class	5			
PIN ID CE	0461CQ1048			
Gas connection	3/8" outside connection			
Electrical connection	6 VDC battery powered			
Gas control system	Mertik Maxitrol SYMAX B6R radio controlled 866 mHz			
Safety	Thermocouple flame supervision and pressurehatches			
Heat distribution	Internal convection system			
Connectivity	Optional App control (Android and IOS). Wallswitch and domotica connection			
Flue type and diameter	Holetherm-CC concentric flue 130-200mm			
Standard supplied	Adjustable legs – Convection chamber and grills – Wall brackets – Log set			
Optional	See product specifications			
Remarks	Always use non-combustible construction materials such as metal stud framing and fireboard cladding.			

Installation details

Concentric flue system

Using the THC-CC double wall chimney system the flue gases are safely transported to the outside and fresh combustion-air is pulled inside the appliance. Balanced flue appliances can be installed using a wall terminal so no traditional chimney is needed. THC-CC is made of high quality stainless steel and approved according CE standards in combination with the Trimline appliances.



Balanced flue gas fire

One of the most innovative aspects of the Trimline 73 Front is that there is no need for an existing chimney to be present. This is all down to the clever features of our balanced flue gas fire, that is fully room sealed. Not only does this make for a highly efficient and safe appliance, but when combined with our concentric flue system, our fires can be positioned in virtually any part of your home with a relatively simple 'chimney breast' built around it. A direct wall outlet from the back of the fire makes the installation even easier.

